


# DURA STEP

PERFORMANCE

MODULAR /  
OILY AREAS

INDUSTRIAL

## COLORS

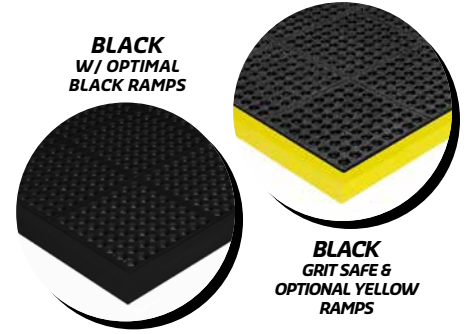

## TECHNICAL INFORMATION

- SURFACE: #752 Nitrile rubber  
#753 Nitrile rubber with grit safe
- WEIGHT SURFACE: #752 = 1.89 lb/ft<sup>2</sup> #753 = 2.22 lb/ft<sup>2</sup>
- THICKNESS: #752 = 5/8" #753 = 5/8"
- TYPE: Modular

Built-in connectors



Optional bevelled male/female ramps



## FINISHING

## WARRANTY



TOTAL CONFIDENCE WARRANTY

## CARPET SIZES & ROLLS

### TILES

3' X 3'

### RAMPS

(BEVELLED MALE/FEMALE RAMPS)  
3" X 3"

CUSTOM MATS : NA

*Comfortable, flexible and durable, this interlocking mat is ideal for oily locations*

- 100% nitrile rubber mat for optimal protection against fats and oils
- Optional Grit-safe anti-slip additive provides excellent traction in oily areas

